

# Power Supplies Selection Guide

## Product Overview/Quick Guide/Cat. No. Explanation



### Bulletin 1606 — Power Supplies ① ②

**Physical**

- Quick mounting and connecting, innovative DIN-Rail mount, smallest in class

**Electrical**

- Low inrush current
- PFC choke
- Wide range input; auto select input
- Superior overload design (continuous current, no hiccup)
- NEC Class 2 'Limited Power' option
- Selectable operating mode (single/parallel)
- Superior efficiency and temperature rating

**Special Modules**

- Brownout buffer, DC to DC converter, N+1 redundancy

**Approvals**

- World-wide approvals ③
- NEC Class 2
- FM Class 1 Div. 2 (T3A)

① Not all features apply to all power supplies; see individual supply descriptions for specifics

② A more detailed list of performance specifications can be found at [www.ab.com/industrialcontrols/products/power\\_supplies/index.html](http://www.ab.com/industrialcontrols/products/power_supplies/index.html)

③ Dual UL rating with cUR<sub>us</sub> 60950 relating to approved use in information technology

### Table of Contents

Quick Guide . . . . . 4  
 Cat. No. Explanation . . . . . 4  
 Product Selection . . . . . 5  
 Specifications . . . . . 6  
 Special Modules . . . . . 10  
 Approximate Dimensions . . . 11  
 Accessories . . . . . 12  
 1606-XL Redundancy Capabilities . . . . . 13  
 1606-XLBuffer . . . . . 14

### Standards Compliance




## Bulletin 1606-(number from table) ④ Power Supply Quick Guide

	30...40 W	50 W	60 W	72 W	100 W	120 W	240 W	480 W	720 W	960 W
5...5.5V	XLP25A	—	—	—	—	—	—	—	—	—
10...12V	XLP30B	—	—	—	—	—	—	—	—	—
12...15V	—	XLP50B	—	—	—	—	—	—	—	—
(+/-)12 and 15V	XLP36C	—	—	—	—	—	—	—	—	—
24...28V 1-Ph	XLP30E	XLP50E	XL60D	XLP72E	XLP100E	XL120D	XL240E XL240EP	XL480E XL480EP XL480EPT	—	—
24...28V 3-Ph	—	—	—	—	—	XL120E-3	XL240E-3	XL480E-3 XL480E-3W XL480F-3H	XL720E-3	XL960E-3 XL960E-3S
36...43V	—	—	—	—	—	—	—	XL480GP	—	—
48...56V	—	XLP50F	—	—	XLP100F	—	XL240FP	XL480F	—	—
24V Redundant	—	—	XL60DR	—	—	XL120DR	XL240DR	XLRED20-30		XLRED40
	—	—	—	—	XLDNET4	—	XLDNET8	—	—	—

④ Example: For a 24...28 Volt, 3-Phase, 120 Watt power supply, the cat. no. would be 1606-XL120E-3.

### Power Supply Cat. No. Explanation

**Important:** The following cat. no. breakdown is for explanation purposes only. It is not a product configurator. Not all combinations of fields are valid product cat. nos. First, select the desired power supply using the product selection table on page 5. Then, use this breakdown for verification and explanation only.

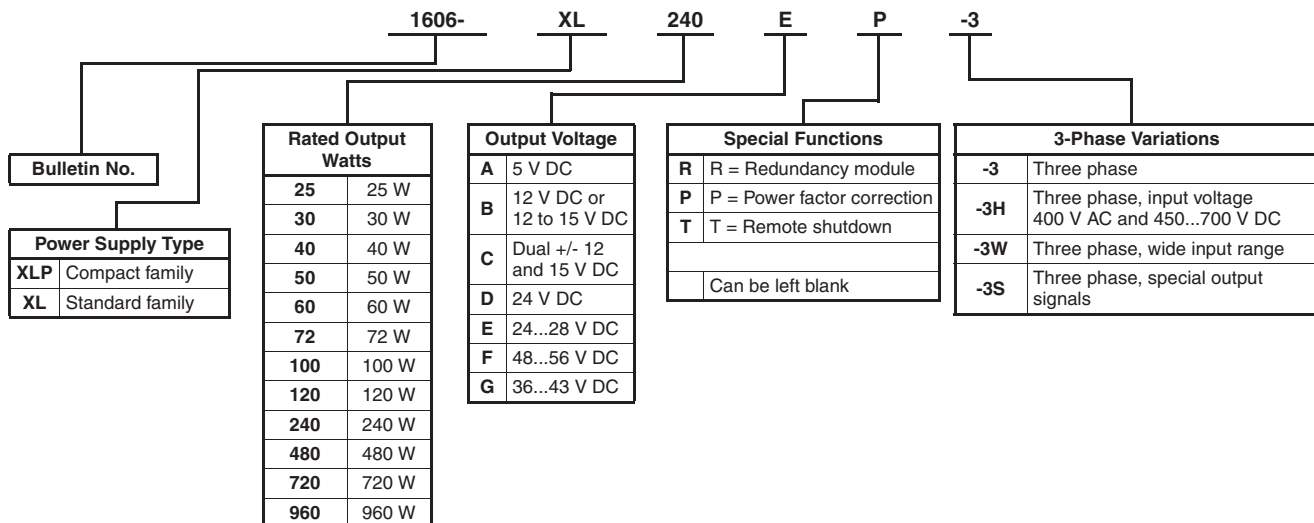

**Bulletin 1606 Product Selection Table**

	Output Power	Output Voltage	Special Feature(s)	Stocked Item	Parallel Operation (Inclined Characteristic)	Meets EN 61000-3-2 (PFC Harmonics)	Catalog Number
<b>1606-XLP Compact</b>							
<b>Single Phase</b>	25 W	DC 5...5.5V	NEC Class 2	X	—	N/A	1606-XLP25A
	30 W	DC 10...12V	NEC Class 2	X	—	N/A	1606-XLP30B
		DC 24...28V	NEC Class 2	X	—	N/A	1606-XLP30E
	36 W	DC +/- 12/15V	Output voltage adjustable	X	—	N/A	1606-XLP36C
		DC 12...15V	NEC Class 2	X	—	N/A	1606-XLP50B
	50 W	DC 24...28V	NEC Class 2	X	—	N/A	1606-XLP50E
		DC 48...56V	NEC Class 2	X	—	N/A	1606-XLP50F
	72 W	DC 24...28V	NEC Class 2	X	—	N/A	1606-XLP72E
	100 W	DC 24...28V	NEC Class 2	X	X Ⓣ	Yes	1606-XLP100E
DC 48...56V		X		X Ⓣ	Yes	1606-XLP100F	
<b>1606-XL Standard Single Phase</b>							
<b>Single Phase</b>	60 W	DC 24V	NEC Class 2	X	—	N/A	1606-XL60D
	120 W		—	X	—	Yes	1606-XL120D
	240 W	DC 24...28V	FM Class 1 Div. 2 T3A	X	—	No	1606-XL240E
			—	X	—	Yes	1606-XL240EP
		DC 48...56V	—	X	—	Yes	1606-XL240FP
	480 W	DC 24...28V	Low inrush current	X	X Ⓣ	No	1606-XL480E
			—	X	X Ⓣ	Yes	1606-XL480EP
		Remote shut down	X	X Ⓣ	Yes	1606-XL480EPT	
		DC 36...43V	—	X	X Ⓣ	Yes	1606-XL480GP
DC 48...56V	—	X	X Ⓣ	No	1606-XL480F		
<b>1606-XL Standard Three Phase</b>							
<b>Three Phase</b>	120 W	DC 24...28V	—	X	—	Yes	1606-XL120E-3
	240 W		Overload behavior selectable (FUSE Mode/continuous current), 2-phase operation admissible	X	X Ⓣ	Yes	1606-XL240E-3
			—	X	X Ⓣ	Yes	1606-XL480E-3
	480 W		Wide input range; overload behavior selectable (FUSE Mode/continuous current)	X	X Ⓣ	Yes	1606-XL480E-3W
		DC 48...56V	Input voltage 400 V AC	X	X Ⓣ	Yes	1606-XL480F-3H
	720 W	DC 24...28V	—	X	X Ⓣ	Yes	1606-XL720E-3
	960 W		Passive load sharing	X	X Ⓣ	Yes	1606-XL960E-3
			Low inrush current; output signals	X	Active current sharing	Yes	1606-XL960E-3S
<b>1606-XL Special Modules</b>							
<b>Special Modules</b>	480 W	DC 23...27.8V	Brownout buffer module	X	—	N/A	1606-XLBUFFER
	40 W	DC 5.1V	DC/DC converter	X	—	No	1606-XLDC40A
	120 W	DC 24V	Electronically limited 4 A	X	—	Yes	1606-XLDNET4
	240 W	DC 24V	Electronically limited 8 A	X	—	No	1606-XLDNET8
	60 W	DC 24...28V	N+1 Redundant capable ①, NEC Class 2	X	X Ⓣ	N/A	1606-XL60DR
	120 W		N+1 Redundant capable ①	X	X Ⓣ	Yes	1606-XL120DR
	240 W		N+1 Redundant capable ①	X	X Ⓣ	No	1606-XL240DR
	720 W		V <sub>in</sub> -.5V typ.	Dual N+1 redundancy ②	X		N/A
	960 W	V <sub>in</sub> -.6V typ.	Single N+1 redundancy ③	X		N/A	1606-XLRED40

**Accessories**





<b>1606 Accessory</b>							
Accessory	—	—		X	—	—	
			Back of panel bracket for XL	X	—	—	1606-XLA

- ① Used with a pair of identical power supplies to offer N+1 redundancy
- ② To be used alongside 20 and 30 A power supplies (or smaller)
- ③ Single/parallel operation (inclined characteristic) selectable (jumper); low inrush current
- ④ To be used alongside 40 A power supplies (or smaller)

# Power Supplies Selection Guide

## Standard Three Phase Specifications

### 1606-XL Three Phase Specifications

				
	<b>1606-XL120E-3</b>	<b>1606-XL240E-3</b>	<b>1606-XL480E-3</b>	<b>1606-XL480E-3W</b>
<b>Watts</b>	24...28V/120 W	24...28V/240 W	24...28V/480 W	24...28V/490 W
<b>Input Voltage ②</b>	3Ø AC 400...500V wide range DC 450...820V	3Ø AC 400...500V wide range DC 450...820V	3Ø AC 480V DC 550...820V	3Ø AC 400...500V wide range DC 450...820V
<b>Operational Range</b>	340...576 V AC		408...576 V AC	340...576 V AC
<b>Hold-up Time</b>	>16ms(3ØAC400V) >10 ms (2Ø AC 400V)	>24ms(3ØAC400V) >20 ms (2Ø AC 400V)	>11 ms	>11 ms (3Ø AC 400V)
<b>Rated Input Current</b>	3 x 0.5 A	3 x 0.8/0.7 A @400/500V	3 x 1.5 A	
<b>Efficiency</b>	typ. 89% (400V)	typ. 91.2% (400V) typ. 92% (500V)	typ. 92%	typ. 92% (400V)
<b>Output Voltage</b>	24...28V 24.5V preset	24...28V 24.5V preset	24...28V 24V preset	24...28V 24.5V preset
<b>Rated Output Current</b>	5 A (at 24V), 4.3 A (at 28V)	10 A (at 24V) 8.6 A (at 28V)	20 A (at 24V), 18 A (at 28V)	
<b>Power Boost</b>	6 A	12 A (up to 288 W)	25 A	
<b>Ripple/Noise (20 MHz)</b>	<25 mV <sub>pp</sub>	<30 mV <sub>pp</sub>	<20 mV <sub>pp</sub>	<30 mV <sub>pp</sub>
<b>Operating Temperature range (T<sub>amb</sub>)</b>	-10...+70°C >60°C with derating	0...+70°C >60°C with derating		
<b>MTBF ④</b>	410 000 hours	543 000 hrs. (3-ph), 525 000 hrs. (2-ph.)	310 000 hours	504 000 hours
<b>Dimensions (W x H x D)</b>	73 x 124 x 117 mm	89 x 124 x 117 mm	220 x 124 x 102 mm	150 x 124 x 121 mm
<b>Weight</b>	730 g	980 g	1800 g	
<b>Approvals/Standards ①</b>	1, 2, 3, 5, 6, 7			
<b>Special Features</b>	PFC choke	Overload behavior selectable (FUSE Mode/continuous current), 2-phase operation admissible, Single/parallel operation (inclined characteristic) select on front panel, PFC choke, ⑤	Single/parallel operation (inclined characteristic) selectable (jumper), PFC choke, ⑤	Single/parallel operation (inclined characteristic) selectable, Overload behavior selectable (FUSE Mode/continuous current), PFC choke, ⑤

① 1) = CE, 2) = UL508 (cULus LISTED), 3) = UL1950 (cURus), 5) Safety standards = IEC/EN 60950, EN 50178, 6) EMC standards = EN 55011 (Class B), EN 55022 (Class B), EN 61000-6-2, 7) = EMC standards = EN 61000-3-2 (A14), EN 50081-1  
 ② 47...63Hz  
 ③ Low inrush current  
 ④ MTBF determined by Siemens norm SN 29500 at full load current and 40°C

**Approximate Dimensions and Wire Size**

Approximate dimensions are shown in inches (mm) unless otherwise indicated. Dimensions are not to be used for manufacturing purposes.

**Bulletin 1606 Dimensions Table**

Catalog Number	W	H	D ❶	Wire Size ❷			
				(Input and Output unless otherwise noted)			
1606-XLP25A	1.77" (45 mm)	2.95" (75 mm)	3.58" (91 mm)	<b>Input/Output ❷</b> Stranded 28...12 AWG (0.3...2.5 mm <sup>2</sup> ) Solid 28...12 AWG (0.3...4 mm <sup>2</sup> )			
1606-XLP30B							
1606-XLP30E							
1606-XLP36C							
1606-XLP50B							
1606-XLP50E							
1606-XLP50F							
1606-XLP72E							
1606-XLP100E	2.87" (73 mm)	2.95" (75 mm)	4.06" (103 mm)				
1606-XLP100F							
1606-XL60D	1.93" (49 mm)	4.88" (124 mm)	4.02" (102 mm)	<b>Input/Output ❷</b> Stranded 20...10 AWG (0.5...4 mm <sup>2</sup> ) Solid 20...10 AWG (0.5...6 mm <sup>2</sup> )			
1606-XL120D	2.56" (64 mm)	4.88" (124 mm)	4.02" (102 mm)				
1606-XL240E	4.72" (120 mm)	4.88" (124 mm)	4.02" (102 mm)				
1606-XL240EP							
1606-XL240FP	8.6" (220 mm)	4.88" (124 mm)	4.02" (102 mm)				
1606-XL480E							
1606-XL480EP							
1606-XL480EPT							
1606-XL480GP							
1606-XL480F							
1606-XL120E-3					2.87" (73 mm)	4.88" (124 mm)	4.61" (117 mm)
1606-XL240E-3					3.50" (89 mm)	4.88" (124 mm)	4.61" (117 mm)
1606-XL480E-3	8.66" (220 mm)	4.88" (124 mm)	4.02" (102 mm)				
1606-XL480E-3W	5.91" (150 mm)	4.88" (124 mm)	4.76" (121 mm)				
1606-XL480F-3H	8.66" (220 mm)	4.88" (124 mm)	4.02" (102 mm)				
1606-XL720E-3	9.45" (240 mm)	4.88" (124 mm)	4.41" (112 mm)				
1606-XL960E-3	10.83" (275 mm)	4.88" (124 mm)	4.61" (117 mm)	<b>Input ❷</b> Stranded 20...10 AWG (0.5...4 mm <sup>2</sup> ) Solid 20...10 AWG (0.5...6 mm <sup>2</sup> )			
1606-XL960E-3S				<b>Output ❷</b> Stranded 22...8 AWG (0.5...10 mm <sup>2</sup> ) Solid 22...8 AWG (0.5...16 mm <sup>2</sup> )			
1606-XLBUFFER	2.56" (64 mm)	4.88" (124 mm)	4.02" (102 mm)	<b>Input/Output ❷</b> Stranded 20...10 AWG (0.5...4 mm <sup>2</sup> ) Solid 20...10 AWG (0.5...6 mm <sup>2</sup> )			
1606-XLDC40A	1.93" (49 mm)	4.88" (124 mm)	4.02" (102 mm)				
1606-XLDNET4	2.56" (64 mm)	4.88" (124 mm)	4.02" (102 mm)				
1606-XLDNET8	4.72" (120 mm)	4.88" (124 mm)	4.02" (102 mm)	<b>Input/Output ❷</b> Stranded 22...10 AWG (0.2...2.5 mm <sup>2</sup> ) Solid 22...10 AWG (0.2...2.5 mm <sup>2</sup> )			
1606-XL60DR	1.93" (49 mm)	4.88" (124 mm)	4.02" (102 mm)	<b>Input/Output ❷</b> Stranded 22...12 AWG (0.2...2.5 mm <sup>2</sup> ) Solid 22...12 AWG (0.2...2.5 mm <sup>2</sup> )			
1606-XL120DR	2.56" (64 mm)	4.88" (124 mm)	4.02" (102 mm)				
1606-XL240DR	4.72" (120 mm)	4.88" (124 mm)	4.02" (102 mm)				
1606-XLRED20-30	1.89" (48 mm)	4.88" (124 mm)	4.02" (102 mm)	<b>Input/Output ❷</b> Stranded 20...10 AWG (0.5...4 mm <sup>2</sup> ) Solid 20...10 AWG (0.5...6 mm <sup>2</sup> )			
1606-XLRED40	1.89" (48 mm)	4.88" (124 mm)	4.61" (117 mm)				



❶ Depth measurement does not include DIN rail.  
 ❷ The wire sizes indicated refer only to the connection capability of the terminal.  
 For proper operation, the correct wire size must be used (based on accurate determination of the electrical characteristics and loading of the system).