

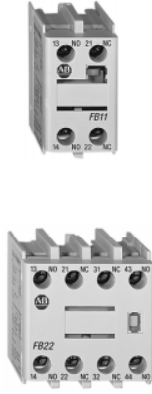
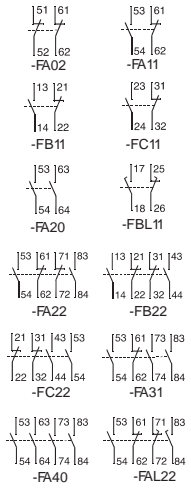

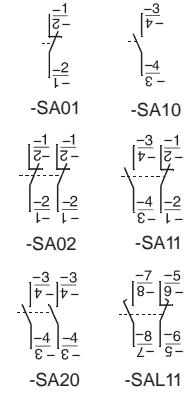

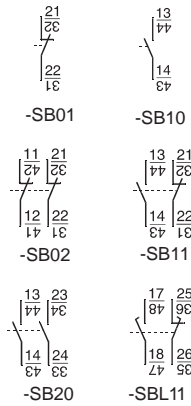


**Auxiliary Contacts**

	Description	 N.O.	 N.C.	Connection Diagrams	For Use With	Cat. No.	*
	<b>Auxiliary Contact Blocks for Front Mounting ❶</b> <ul style="list-style-type: none"> <li>2- and 4-pole</li> <li>Quick and easy mounting without tools</li> <li>Electronic compatible contacts to 17V, 5mA</li> <li>Mutual positive guidance to the main contactor poles (except for L types)</li> <li>Models with equal function with several terminal numbering choices</li> </ul> L = Late break / Early make	0	2		100-C all	100-FA02	
		1	1		100-C all C09⊗10...C23⊗10 C30⊗00...C85⊗00 C09⊗01...C23⊗01	100-FA11 100-FB11 100-FC11	
		2	0		100-C all	100-FA20	
		1L	1L		C30⊗00...C85⊗00	100-FBL11	
		2	2		100-C all C09⊗10...C23⊗10 C30⊗00...C85⊗00 C09⊗01...C23⊗01	100-FA22 100-FB22 100-FC22	
		3	1		100-C all	100-FA31	
		4	0		100-C all	100-FA40	
		1+1L	1+1L		100-C all	100-FAL22	
	<b>Auxiliary Contact Blocks for Side Mounting without Sequence Terminal Designations ❶</b> <ul style="list-style-type: none"> <li>1- and 2-pole</li> <li>Two-way numbering for right or left mounting on the contactor</li> <li>Quick and easy mounting without tools</li> <li>Electronic compatible contacts to 17V, 5mA</li> <li>Mutual positive guidance to the main contactor poles (except for L types)</li> </ul> L = Late break/Early make	0	1		100-C all	100-SA01	
		1	0		100-C all	100-SA10	
		0	2		100-C all	100-SA02	
		1	1		100-C all	100-SA11	
		2	0		100-C all	100-SA20	
		L1	L1		100-C all	100-SAL11	
	<b>Auxiliary Contact Blocks for Side Mounting with Sequence Terminal Designations ❶</b> <ul style="list-style-type: none"> <li>1- and 2-pole</li> <li>Two-way numbering for right or left mounting on the contactor</li> <li>Quick and easy mounting without tools</li> <li>Electronic compatible contacts to 17V, 5mA</li> <li>Mutual positive guidance to the main contactor poles (except for L types)</li> </ul> L = Late break/Early make	0	1		100-C all	100-SB01	
		1	0		100-C ❷	100-SB10	
		0	2		100-C ❷	100-SB02	
		1	1		100-C ❷	100-SB11	
		2	0		100-C ❷	100-SB20	
		L1	L1		100-C ❷	100-SBL11	

❶ Up to 8 auxiliary contacts may be mounted (a maximum of 4 N.C. contacts on the front of the contactor and a maximum of 2 N.O. contacts on each side).

❷ Double Numbering  
 Left side mounting only is recommended for **Cat. No. 100-C09...100-C23** due to double numbering.