


194E-A16...100 A, Base/DIN Rail Mounting

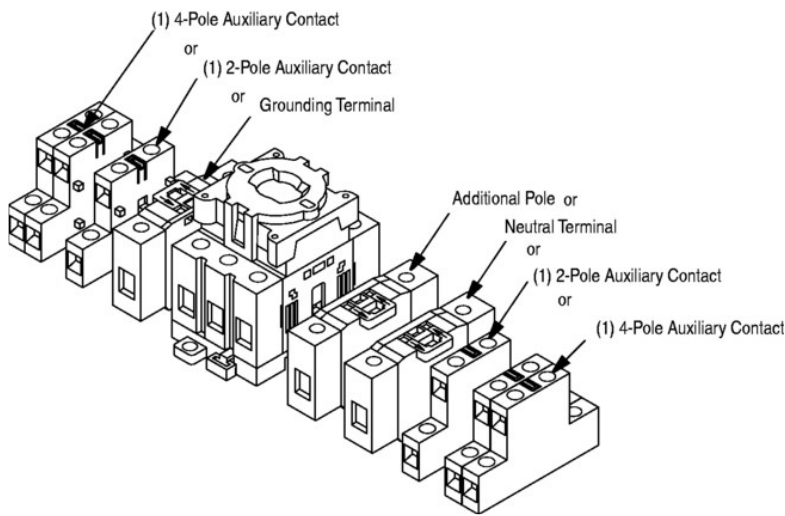

Accessory Configuration Guidelines

Accessory drawings represent modular, snap-on features of Bulletin 194E accessories. They are not suggesting possible accessory configurations. Use the following guidelines for choosing Bul. 194E accessory configurations.

- Up to two accessories may be added to the Bulletin 194E switch body.
- For the Bul. 194E 16, 25, 32, 40, or 63 A switches, the early break auxiliary contact (-PD10) may only be used in the following configurations:
 - As a single unit on either side of the switch
 - As a single unit on a side when used with a switch + 4th pole (-NP)
 - As a single unit on a side when used with a switch + ground terminal (-PE)
 - As a single unit on a side when used with a switch + neutral terminal (-TN)
 No other auxiliary contact may be used in combinations with an early break auxiliary contact (-PD10)
- Other combinations of auxiliary contacts are permissible.
- For the Bul. 194E 80 and 100 A switches, any combination of auxiliary contacts, 4th pole, ground terminal, neutral terminal, and -PD10 is permissible.

Auxiliary Contacts	No. of Auxiliary Contacts	For Use With	Cat. No.*
	1 N.O. + 1 N.C.	194E-A16...100	194E-A-P11
		194E-E16...100	194E-E-P11
	1 N.O. + 1 N.C.L.B.	194E-A16...100	194E-A-PL11
		194E-E16...100	194E-E-PL11
	2 N.O. + 2 N.C.	194E-A16...100	194E-A-P22
		194E-E16...100	194E-E-P22
	1 N.O.E.B.	194E-A16	194E-A16-PD10
		194E-A25...100	194E-A-PD10
		194E-E16	194E-E16-PD10
		194E-E25...100	194E-E-PD10